

Constant Voltage LED Driver

800W | 120-277Vac Input

■ Features

- Absolute Supply Voltage: 108-305Vac
- Great Surge Immunity 10kV
- 95% Efficiency
- Low Inrush Current
- 100,000Hour Life @ Tc=75 °C
- UL Class P, ENEC/CB/RCM SELV Output
- Safety according to EN 61347-1, 61347-2-3, 61347-2-13, 62384



■ Model List

Model Number	Input Voltage Range	Output Power	Output Voltage	Full Power Settable Current Min	Full Power Settable Current Max	Certification
BLD-800-V054-NNU/S	108-305Vac	800 W	54Vdc	0A	14.8A	UL/FCC/CB/ENEC/RCM
BLD-800-V048-NNU/S	108-305Vac	800 W	48Vdc	0A	16.7A	UL/FCC/CB/ENEC/RCM
BLD-800-V024-NNU/S	108-305Vac	800 W	24Vdc	0A	33.3A	UL/FCC/CB/ENEC/RCM

BLD-800-V Series

■ Technical Data

Input Voltage	108-305Vac
Input Frequency	47~63Hz
Power Factor	>0.9@60-100%load, refer to PF vs. Load curve
THD	<15%@60-100%load, refer to THD vs. Load curve
Input Current	3.1Amax@277Vac & Full-Load, 7.3Amax@120Vac & Full-Load
Inrush Current	15A peak,3.2ms duration, <0.25A2s@220Vac, Cold Start 20A peak,3.3ms duration, <0.5A2s@277Vac, Cold Start
Leakage Current	1mA max @277Vac 60Hz, UL8750,0.75mA max @220Vac 50Hz, IEC61347-1
Input Under Voltage	Shut down and auto-restart
Input Over Voltage	*Optional: Shutdown @320Vac
Surge Protection	Line to line 6kV, line to ground 10kV, IEC 61000-4-5
Voltage Accuracy	±5%Vo
Voltage Ripple	Vp-p:5%Vo max
Setup Time	1.2s max
Overshoot	10% Io max & LED Load
Output Over Voltage	110% Vomax, typ.
Short Circuit	Auto recovery. The output recovers when short is removed.
Over Temperature	Lower the output current when $T_c \geq 105 \pm 10^\circ\text{C}$; Auto Recovery When $T_c \leq 70 \pm 10^\circ\text{C}$
Operating Temperature	Case Temperature $T_c = -40^\circ\text{C} \sim +90^\circ\text{C}$; 10%RH~100%RH
Storage Temperature	$-40^\circ\text{C} \sim +85^\circ\text{C}$; 5%RH~100%RH
MTBF	$\geq 280,000$ hours, 75°C case temperature (MIL-HDBK-217F)
Lifetime	$\geq 100,000$ hours, 75°C case temperature, refer to life vs. T_c curve
Case Temperature	90°C max, marked in the T_c point of label
Dimensions	9.33x4.92x1.69 by inch (body), 10.3x4.92x1.69 by inch (endcaps included) 237 x 125 x 43 by mm (body), 262 x 125 x 43 by mm (endcaps included)
Net Weight	2600g
Packing	8pcs/Carion/22.8kg, 490 x 370 x 250 by mm


Notes: Unless specified, all the test results are measured in 25°C room temperature.

* marked items are optional and contact with sales people to get the functions.

■ Safety/EMC Compliance


Safety Standard	Description
UL8750	Light emitting diode(LED) equipment for use in lighting products
UL1012	Power units other than class 2
IEC 61347-1	Lamp control gear Part 1: general and safety requirements
IEC 61347-2-13	Lamp control gear Part 2-13: particular requirement for d.c. or a.c. supplied electronic control gear for LED modules
EMI Standards	Description
IEC 55015	Conducted emission test & radiated emission test
IEC 61000-3-2	Harmonic current emissions; Class C
IEC 61000-3-3	Voltage fluctuations & flicker
FCC Part 15	ANSI C63.4:2009 Class B
EMS Standards	Description
IEC 61000-4-2	Electrostatic discharge (ESD): 8 kV air discharge, 4 kV contact discharge
IEC 61000-4-3	Radio frequency electromagnetic field susceptibility test (RS)
IEC 61000-4-4	Electrical fast transient (EFT)
IEC 61000-4-5	Surge immunity test
IEC 61000-4-6	Conducted radio frequency disturbances test (CS)
IEC 61000-4-8	Power frequency magnetic field test
IEC 61000-4-11	Voltage dips
IEC 61547	Electromagnetic immunity requirements applies to lighting equipment



■ **Lifetime vs. Case Temperature**

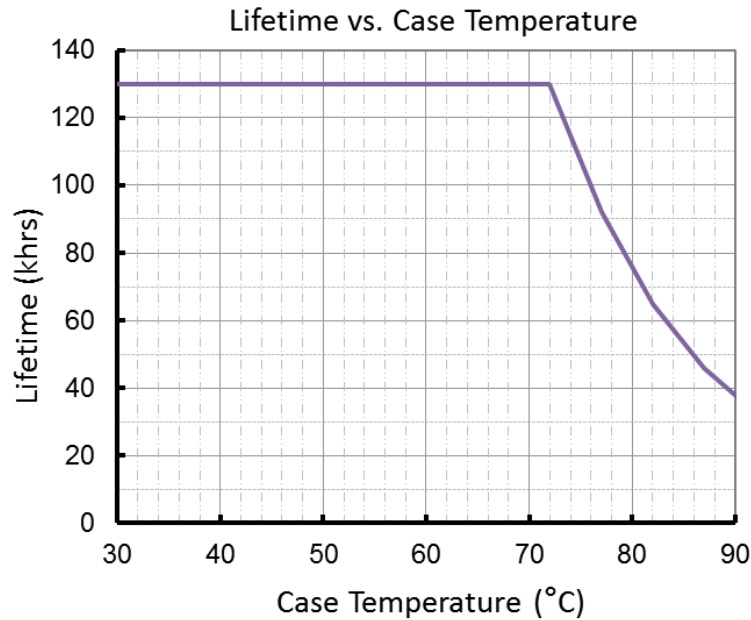

(End of Life: Maximum Failure Rate=10%)

■ **Power Factor vs. Load**

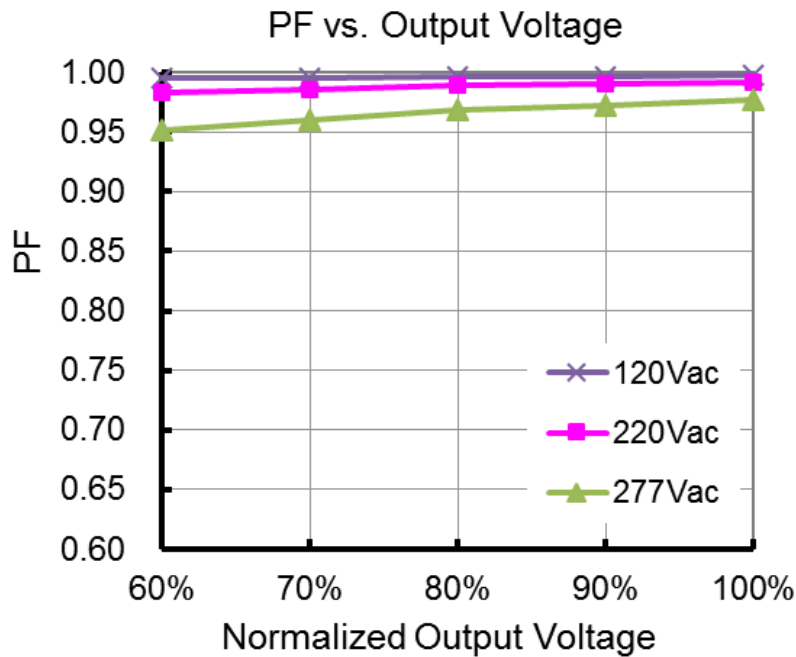


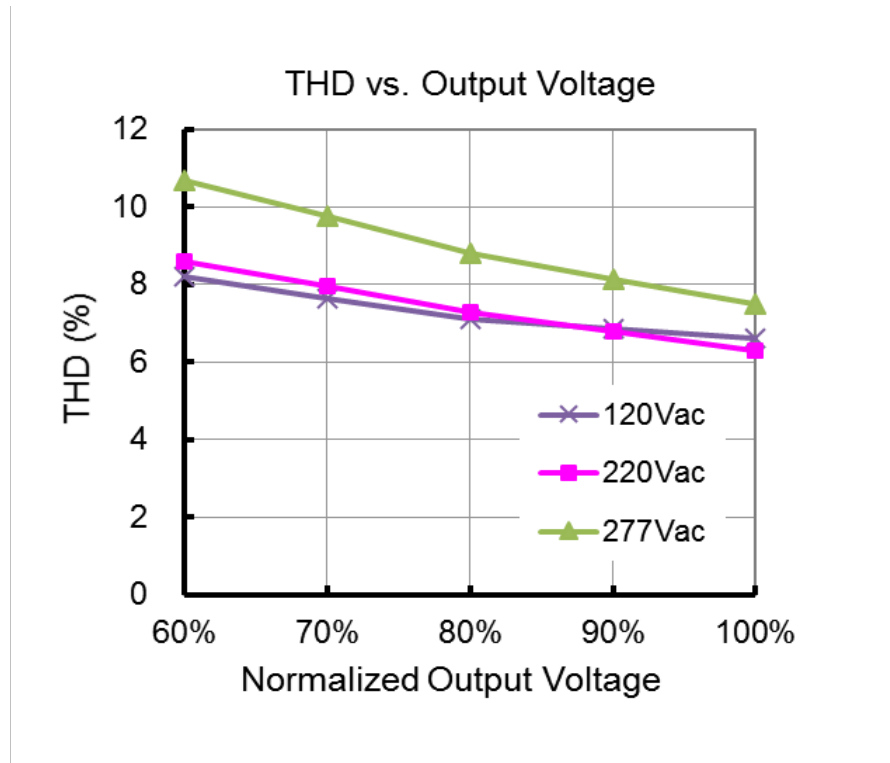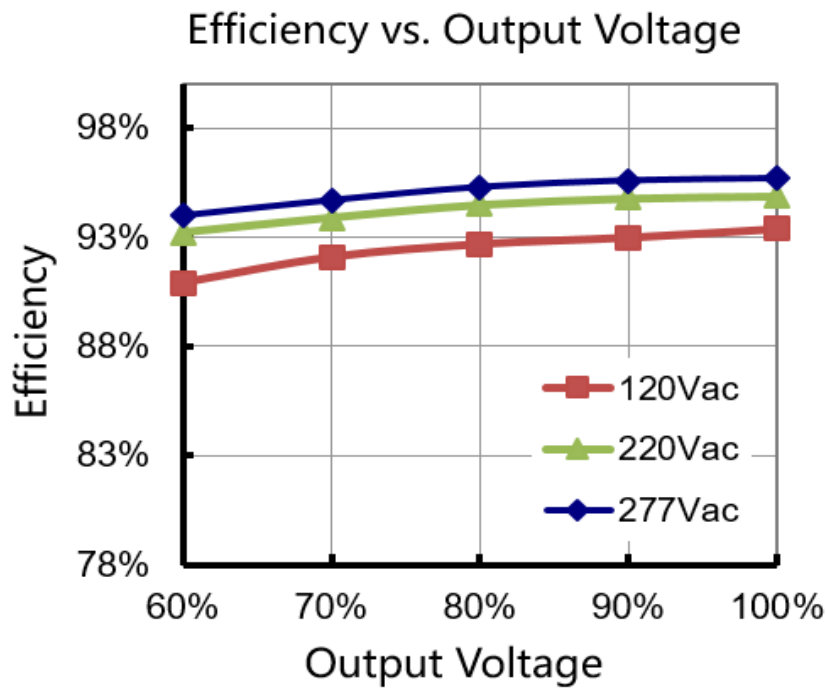THD vs. Load

Efficiency vs. Load (54V Model)


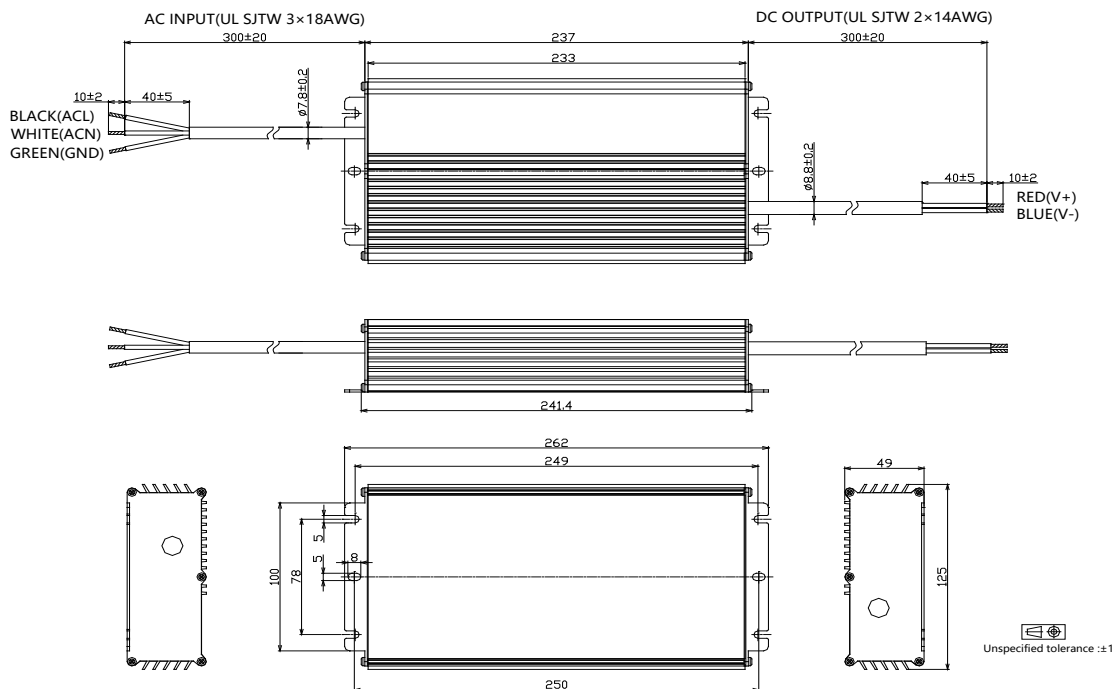
BLD-800-V Series

■ Mechanical Design

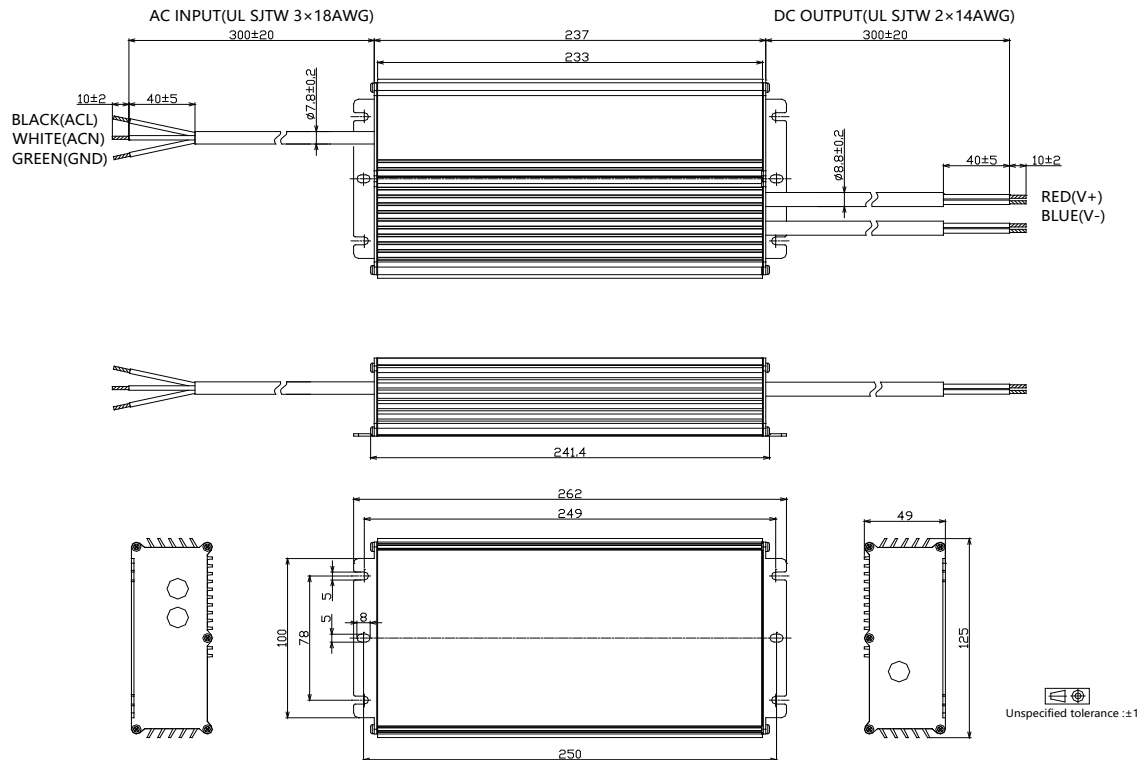- UL Cable Model (24V Output Models)




- UL Cable Model (48V, 54V Output Models)



BLD-800-V Series

- VDE Cable Model (24V Output Models)

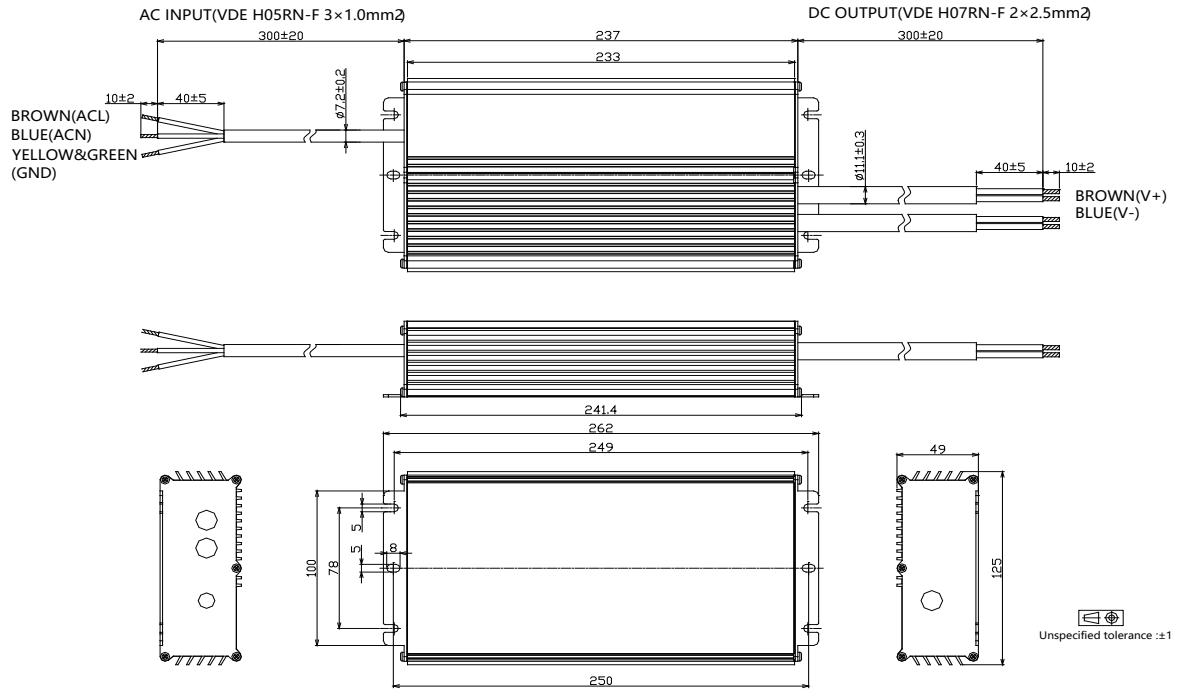

- VDE Cable Model (48V, 54V Output Models)

